
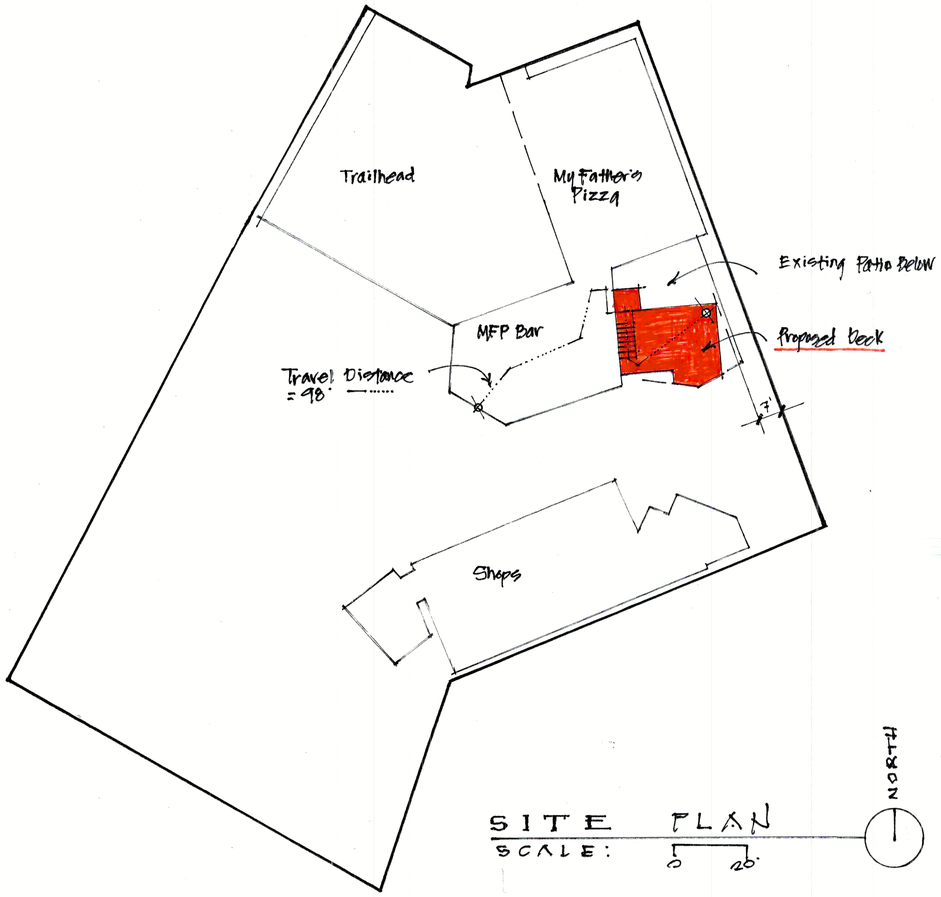


SITE PLAN
SCALE: 0 20'

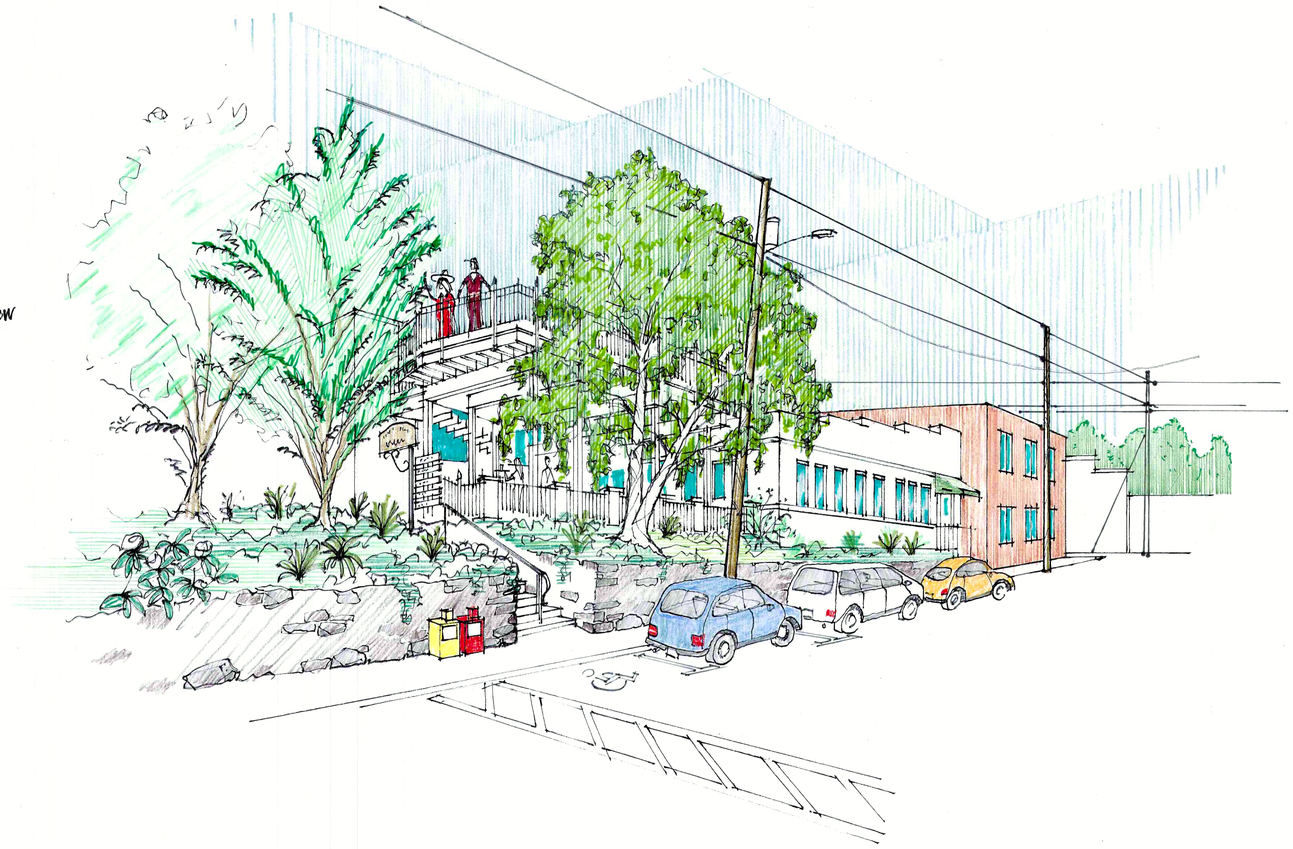

PERSPECTIVE
N.T.S.

TEAM MEMBERS

OWNER:	CHLOE TREADWAY
ARCHITECT:	STEPHENS SMITH FARRELL
STRUCTURAL ENGINEER:	SKYLAND ENGINEERING
GEOTECHNICAL ENGINEER:	GENTRY GEOTECHNICAL
GENERAL CONTRACTOR:	SEMPER FI

DRAWING LIST

C.101	COVER, SITE, RENDERING
C.102	TDBM BUILDING CODE SUMMARY
A.101	EXISTING CONDITIONS, DEMO, LAYOUT
A.102	DECK FLOOR PLAN
A.201	ELEV. 1 & 2, SECTION 1/A.201
A.202	ELEV. 3 & 4, SECTION 2/A.202
S2.00	FOUNDATION PLAN
S2.01	FLOOR FRAMING PLAN
S2.02	DETAILS

8.29.24

STEPHENS
SMITH
FARRELL
ARCHITECTURE

103 NINTH STREET
BLACK MOUNTAIN,
NC 28711

828 231 4915

SSF@ASHEVILLE
ARCHITECT.COM

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711

STEPHENS SMITH FARRELL REGISTERED ARCHITECT NO. 7488 BLACK MOUNTAIN, NORTH CAROLINA

C.101

8.29.24

Town of Black Mountain Building Code Summary For Commercial Projects

Name of Project: My Father's Pizza, Additions and Improvements To,
Address: 110 Cherry Street Zip Code 28711
Owner/Authorized Agent: S.Farrell Phone # (828 231 · 4915 E-Mail SSF@ Asheville Architect. Com
Owned By: ☐ City/County ☑ Private ☐ State ☐ State
Code Enforcement Jurisdiction: ☑ City Blk. Mtn. ☐ County_____

CONTACT:

DESIGNER	FIRM	NAME	LICENSE #	TELEPHONE #	E-MAIL
Architectural	SSFarrell Arch.	Steve F.	7486	(828 231.4915	
Civil	—			( )	
Electrical	—			( )	
Fire Alarm	—			( )	
Plumbing	—			( )	
Mechanical	—			( )	
Sprinkler-Standpipe	—			( )	
Structural	Skyland Eng.	S. Byers		(828 · 947 ·	Skyland Engineering
Retaining Walls >5' High	—			( ) 1498	NC.rr.com
Other	—			( )	

("Other" should include firms and individuals such as truss, precast, pre-engineered, interior designers, etc.)

2018 NC BUILDING CODE: ☐ New Building ☑ Addition ☐ Renovation
☐ 1st Time Interior Completion
☐ Shell/Core - Contact the local inspection jurisdiction for possible additional procedures and requirements
☐ Phased Construction - Shell/Core- Contact the local inspection jurisdiction for possible additional procedures and requirements

2018 NC EXISTING BUILDING CODE: EXISTING: ☐ Prescriptive ☐ Repair ☐ Chapter 14
Alteration: ☑ Level I ☐ Level II ☐ Level III
☐ Historic Property ☐ Change of Use

CONSTRUCTED: (date) 1926 **CURRENT OCCUPANCY(S)** (Ch. 3): A-2
RENOVATED: (date) ? **PROPOSED OCCUPANCY(S)** (Ch. 3): A-2

RISK CATEGORY (Table 1604.5): **Current:** ☐ I ☑ II ☐ III ☐ IV
Proposed: ☐ I ☑ II ☐ III ☐ IV

BASIC BUILDING DATA
Construction Type: ☐ I-A ☐ II-A ☐ III-A ☐ IV ☐ V-A
(check all that apply) ☐ I-B ☐ II-B ☐ III-B ☑ V-B
Sprinklers: ☑ No ☐ Partial ☐ Yes ☐ NFPA 13 ☐ NFPA 13R ☐ NFPA 13D
Standpipes: ☑ No ☐ Yes Class ☐ I ☐ II ☐ III ☐ Wet ☐ Dry
Fire District: ☐ No ☑ Yes **Flood Hazard Area:** ☑ No ☐ Yes
Special Inspections Required: ☑ No ☐ Yes (Contact the local inspection jurisdiction for additional procedures and requirements.)

Gross Building Area Table

FLOOR	EXISTING (SQ FT)	NEW (SQ FT)	SUB-TOTAL
3rd Floor			
2nd Floor			
Mezzanine			
1st Floor	7,975	NA: Exterior Only	
Basement			
TOTAL	7,975	—	7,975

ALLOWABLE AREA

Primary Occupancy Classification(s):
Assembly ☐ A-1 ☑ A-2 ☐ A-3 ☐ A-4 ☐ A-5
Business ☐
Educational ☐
Factory ☐ F-1 Moderate ☐ F-2 Low
Hazardous ☐ H-1 Detonate ☐ H-2 Deflagrate ☐ H-3 Combust ☐ H-4 Health ☐ H-5 HPM
Institutional ☐ I-1 Condition ☐ 1 ☐ 2
☐ I-2 Condition ☐ 1 ☐ 2
☐ I-3 Condition ☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5
☐ I-4
Mercantile ☐
Residential ☐ R-1 ☐ R-2 ☐ R-3 ☐ R-4
Storage ☐ S-1 Moderate ☐ S-2 Low ☐ High-piled
☐ Parking Garage ☐ Open ☐ Enclosed ☐ Repair Garage
Utility and Miscellaneous ☐

Accessory Occupancy Classification(s): —
Incidental Uses (Table 509): —
Special Uses (Chapter 4 – List Code Sections): —
Special Provisions: (Chapter 5 – List Code Sections): —
Mixed Occupancy: ☑ No ☐ Yes Separation: ___ Hr. Exception: _____

☑ Non-Separated Use (508.3) - The required type of construction for the building shall be determined by applying the height and area limitations for each of the applicable occupancies to the entire building. The most restrictive type of construction, so determined, shall apply to the entire building.

☐ Separated Use (508.4) - See below for area calculations for each story, the area of the occupancy shall be such that the sum of the ratios of the actual floor area of each use divided by the allowable floor area for each use shall not exceed 1.

$$\frac{\text{Actual Area of Occupancy A}}{\text{Allowable Area of Occupancy A}} + \frac{\text{Actual Area of Occupancy B}}{\text{Allowable Area of Occupancy B}} \leq 1$$

0.7326 + 0.5963 + ... = 1.339 ≤ 1.00
N.G: See Area Increase

STORY NO.	DESCRIPTION AND USE	(A) BLDG AREA PER STORY (ACTUAL)	(B) TABLE 506.2[4] AREA	(C) AREA FOR FRONTAGE INCREASE[1,2]	(D) ALLOWABLE AREA PER STORY OR UNLIMITED[2,3]
1	MFP	4,346	6,000	329	8,700 ✓
1	Trailhead	3,579	6,000	415	8,700 ✓

[1] Frontage area increases from Section 506.3 are computed thus:
a. Perimeter which fronts a public way or open space having 20 feet minimum width = 329 (F)
b. Total Building Perimeter = 404 (P)
c. Ratio (F/P) = .815 (F/P)
d. W = Minimum width of public way = 25 (W)
e. Percent of frontage increase I_f = 100[F/P − 0.25] x W/30 = 45 (%)
[2] Unlimited area applicable under conditions of Section 507.
[3] Maximum Building Area = total number of stories in the building x D (maximum3 stories) (506.2).
[4] The maximum area of open parking garages must comply with Table 406.5.4.
[5] Frontage increase is based on the unsprinklered area value in Table 506.2.

ALLOWABLE HEIGHT

	ALLOWABLE	SHOWN ON PLANS	CODE REFERENCE[1]
Building Height in Feet (Table 504.3)[2]	40'	20'	—
Building Height in Stories (Table 504.4)[3]	1	1	—

[1] Provide code reference if the "Shown on Plans" quantity is not based on Table 504.3 or 504.4.
[2] The maximum height of air traffic control towers must comply with Table 412.3.1.
[3] The maximum height of open parking garages must comply with Table 406.5.4.

FIRE PROTECTION REQUIREMENTS NA for V-B

BUILDING ELEMENT	FIRE SEPARATION DISTANCE (FEET)	RATING REQ'D	RATING PROVIDED (W/_____* REDUCTION)	DETAIL # AND SHEET #	DESIGN # FOR RATED ASSEMBLY	SHEET # FOR RATED PENETRATION	SHEET # FOR RATED JOINTS
Structural Frame, including columns, girders, trusses							
Bearing Walls							
Exterior							
North							
East							
West							
South							
Interior							
Nonbearing Walls and Partitions							
Exterior walls							
North							
East							
West							
South							
Interior walls and partitions							
Floor Construction Including supporting beams and joists							
Floor Ceiling Assembly							
Columns Supporting Floors							
Roof Construction, including supporting beams and joists							
Roof Ceiling Assembly							
Columns Supporting Roof							
Shaft Enclosures - Exit							
Shaft Enclosures - Other							
Corridor Separation							
Occupancy/Fire Barrier Separation							
Party/Fire Wall Separation							
Smoke Barrier Separation							
Smoke Partition							
Tenant/Dwelling Unit/ Sleeping Unit Separation							
Incidental Use Separation							

* Indicate section number permitting reduction

ENERGY SUMMARY

ENERGY REQUIREMENTS:
The following data shall be considered minimum and any special attribute required to meet the energy code shall also be provided. Each Designer shall furnish the required portions of the project information for the plan data sheet. If performance method, state the annual energy cost for the standard reference design vs annual energy cost for the proposed design.

Existing building envelope complies with code: ☑ No ☐ Yes (The remainder of this section is not applicable)
Exempt Building: ☐ No ☑ Yes (Provide code or statutory reference): Pre-Exists, 1933 Bldg. Code
Climate Zone: ☐ 3A ☑ 4A ☐ 5A
Method of Compliance: Energy Code ☐ Performance ☐ Prescriptive
ASHRAE 90.1 ☐ Performance ☐ Prescriptive
(If "Other" specify source here): NA, Exterior Deck

THERMAL ENVELOPE (Prescriptive method only) NA

Roof/ceiling Assembly (each assembly)
Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____
Skylights in each assembly: _____
U-Value of skylight: _____
total square footage of skylights in each assembly: _____

Exterior Walls (each assembly)
Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____
Openings (windows or doors with glazing)
U-Value of assembly: _____
Solar heat gain coefficient: _____
projection factor: _____
Door R-Values: _____

Walls below grade (each assembly)
Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____

Floors over unconditioned space (each assembly)
Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____

Floors slab on grade
Description of assembly: _____
U-Value of total assembly: _____
R-Value of insulation: _____
Horizontal/vertical requirement: _____
slab heated: _____

PERCENTAGE OF WALL OPENING CALCULATIONS

FIRE SEPARATION DISTANCE (FEET) FROM PROPERTY LINES	DEGREE OF OPENINGS PROTECTION (TABLE 705.8)	ALLOWABLE AREA (%)	ACTUAL SHOWN ON PLANS (%)
10'	0	No Limit	0

LIFE SAFETY SYSTEM REQUIREMENTS

Emergency Lighting: ☑ No ☐ Yes
Exit Signs: ☐ No ☑ Yes
Fire Alarm: ☑ No ☐ Yes
Smoke Detection Systems: ☐ No ☑ Yes ☐ Partial Existing
Carbon Monoxide Detection: ☑ No ☐ Yes

LIFE SAFETY PLAN REQUIREMENTS

Life Safety Plan Sheet #: C-101

☑ Fire and/or smoke rated wall locations (Chapter 7)
☑ Assumed and real property line locations (if not on the site plan)
☒ Exterior wall opening area with respect to distance to assumed property lines (705.8)
☑ Occupancy Use for each area as it relates to occupant load calculation (Table 1004.1.2)
☑ Occupant loads for each area
☑ Exit sign locations (1013)
☑ Exit access travel distances (1017)
☑ Common path of travel distances (Tables 1006.2.1 & 1006.3.2(1))
☒ Dead end lengths (1020.4)
☑ Clear exit widths for each exit door
☑ Maximum calculated occupant load capacity each exit door can accommodate based on egress width (1005.3)
☑ Actual occupant load for each exit door
☒ A separate schematic plan indicating where fire rated floor/ceiling and/or roof structure is provided for purposes of occupancy separation
☑ Location of doors with panic hardware (1010.1.10)
☒ Location of doors with delayed egress locks and the amount of delay (1010.1.9.7)
☒ Location of doors with electromagnetic egress locks (1010.1.9.9)
☑ Location of doors equipped with hold-open devices
☒ Location of emergency escape windows (1030)
☑ The square footage of each fire area (202)
☒ The square footage of each smoke compartment for Occupancy Classification I-2 (407.5)
☒ Note any code exceptions or table notes that may have been utilized regarding the items above

ACCESSIBLE DWELLING UNITS NA
(SECTION 1107)

UNIT CLASSIFICATION	TOTAL UNITS	ACCESSIBLE UNITS REQUIRED	ACCESSIBLE UNITS PROVIDED	TYPE A UNITS REQUIRED	TYPE A UNITS PROVIDED	TYPE B UNITS REQUIRED	TYPE B UNITS PROVIDED	TOTAL ACCESSIBLE UNITS PROVIDED

ACCESSIBLE PARKING
(SECTION 1106)

LOT OR PARKING AREA	TOTAL # OF PARKING SPACES		# OF ACCESSIBLE SPACES PROVIDED		TOTAL # ACCESSIBLE PROVIDED
	REQUIRED	PROVIDED	96" SPACES	132" SPACES	
LOT	0	1	1		1
TOTAL	0	1	1		1

PLUMBING FIXTURE REQUIREMENTS
(TABLE 2902.1)

USE		WATER CLOSETS			URINALS	LAVATORIES			SHOWERS /TUBS	DRINKING FOUNTAINS	
		MALE	FEMALE	UNISEX		MALE	FEMALE	UNISEX		REGULAR	ACCESSIBLE
SPACE	EXIST'G	2	3		2	2	2				
	NEW										
	REQ'D *	2	3		1	1	2				

SPECIAL APPROVALS

Special approval: (Local jurisdiction, Department of Insurance, OSC, DPI, DHHS, etc., describe below)

STRUCTURAL DESIGN
(PROVIDE ON THE STRUCTURAL SHEETS IF APPLICABLE)

DESIGN LOADS:

Importance Factors: Snow (Is) 1.0 Seismic (Ie) 1.0

Live Loads: Roof — psf Mezzanine — psf Floor 100 psf

Ground Snow Load: NA psf

Wind Load: Ultimate Wind Speed 110 mph (ASCE-7) Exposure Category 1

SEISMIC DESIGN CATEGORY: ☐ A ☐ B ☑ C ☐ D
Provide the following Seismic Design Parameters:
Risk Category (Table 1604.5) ☐ I ☑ II ☐ III ☐ IV
Spectral Response Acceleration S_s_____%g S_1_____%g
Site Classification (ASCE 7) ☐ A ☐ B ☑ C ☐ D ☐ E ☐ F
Data Source: ☐ Field Test ☐ Presumptive ☐ Historical Data
Basic structural system ☐ Bearing Wall ☐ Dual w/Special Moment Frame
☐ Building Frame ☐ Dual w/Intermediate R/C or Special Steel
☑ Moment Frame ☐ Inverted Pendulum
Analysis Procedure: ☑ Simplified ☐ Equivalent Lateral Force ☐ Dynamic
Architectural, Mechanical, Components anchored? ☐ Yes ☐ No

LATERAL DESIGN CONTROL: Earthquake ☐ Wind ☑


SOIL BEARING CAPACITIES:
Field Test (provide copy of test report) T.B.D psf Gentry
Presumptive Bearing capacity _____psf
Pile size, type, and capacity _____

STEPHENS SMITH FARRELL ARCHITECTURE
103 NINTH STREET
BLACK MOUNTAIN, NC 28711
828 231 4915
SSF@ASHEVILLE ARCHITECT.COM

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711

STEPHENS SMITH FARRELL ARCHITECTURE REGISTERED LANDSCAPE ARCHITECT NO. 7486 NORTH CAROLINA BLACK MOUNTAIN, NC

C-102

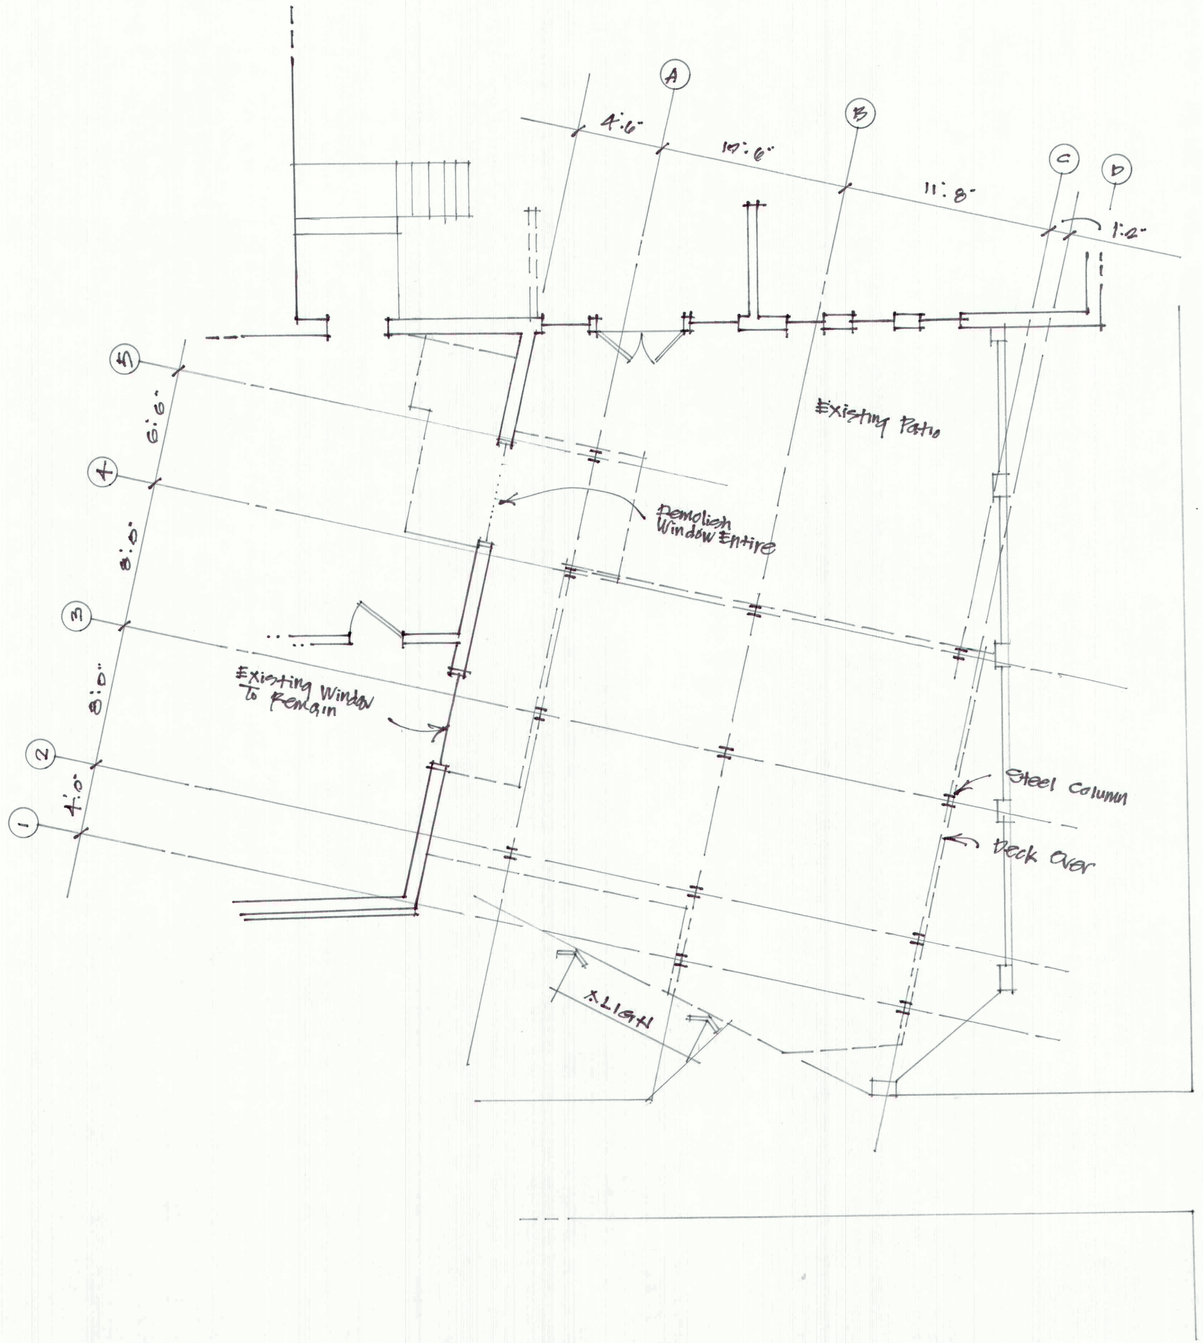

LAYOUT / DEMOLITION PLAN
1/4"

8.29.24

STEPHENS
SMITH
FARRELL
ARCHITECTURE

103 NINTH STREET
BLACK MOUNTAIN,
NC 28711

828 231 4915

SSF@ASHEVILLE
ARCHITECT.COM

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711



A-101


8.29.24

STEPHENS
SMITH
FARRELL
ARCHITECTURE


103 NINTH STREET
BLACK MOUNTAIN,
NC 28711

828 231 4915

SSF@ASHEVILLE
ARCHITECT.COM

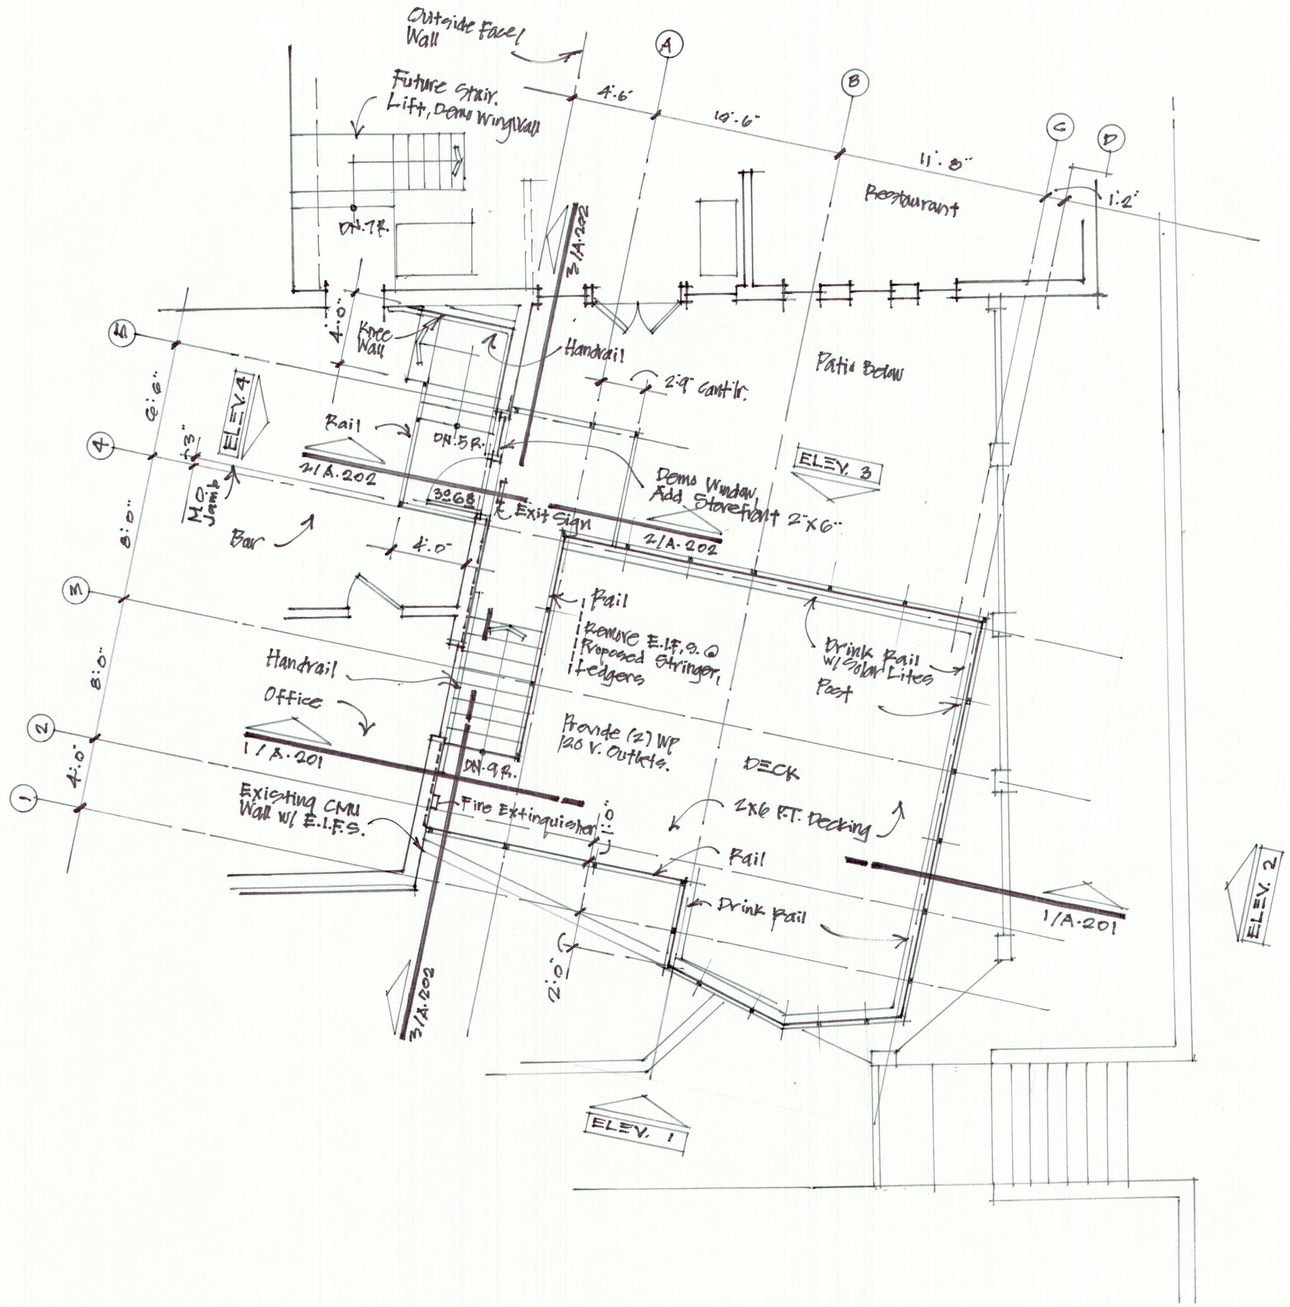

FLOOR PLAN
1/4"

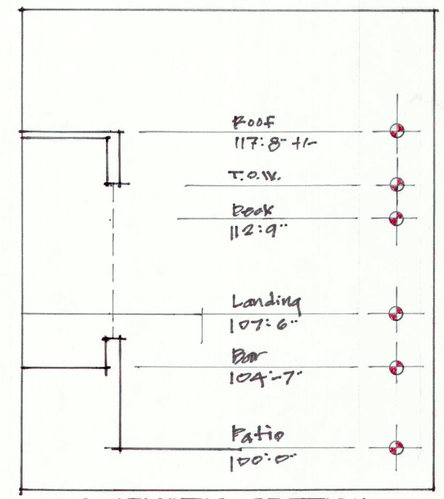

SCHEMATIC SECTION
1/4"

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711

STEPHENS SMITH FARRELL REGISTERED ARCHITECT NO. 7486 NORTH CAROLINA BLACK MOUNTAIN, NC

A-102


8.29.24

STEPHENS
SMITH
FARRELL
ARCHITECTURE


103 NINTH STREET
BLACK MOUNTAIN,
NC 28711

828 231 4915


SSF@ASHEVILLE
ARCHITECT.COM

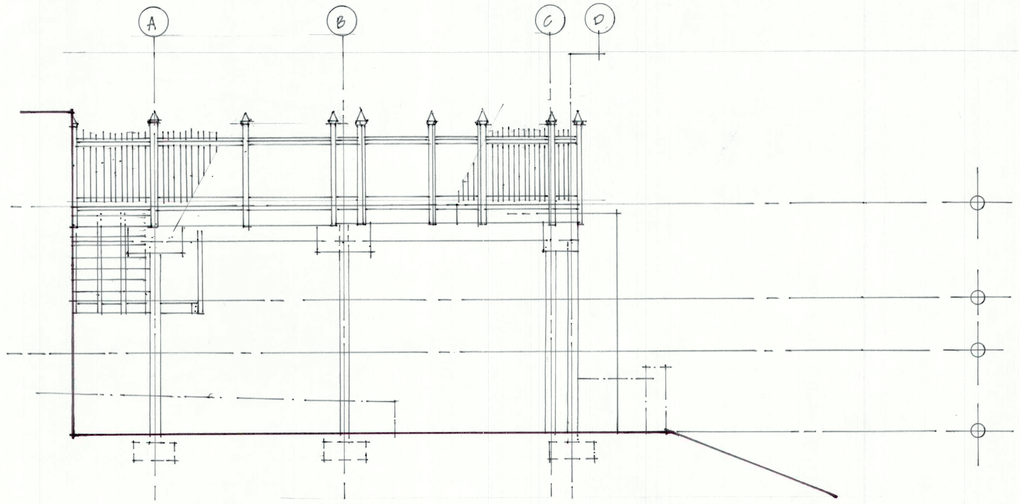


ELEV. 1
1/4"

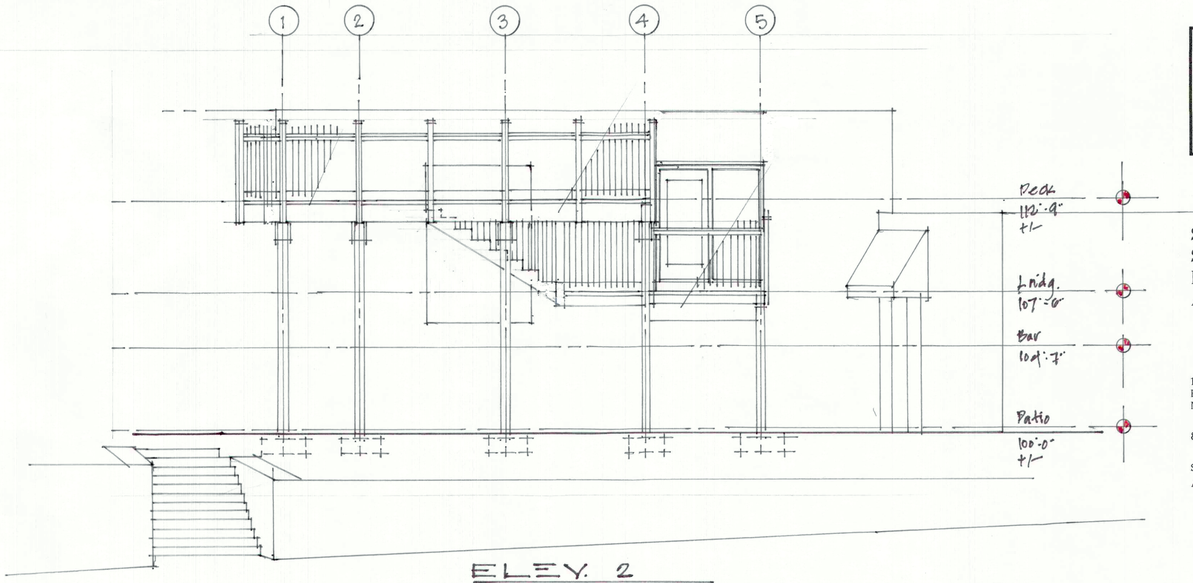

ELEV. 2
1/4"

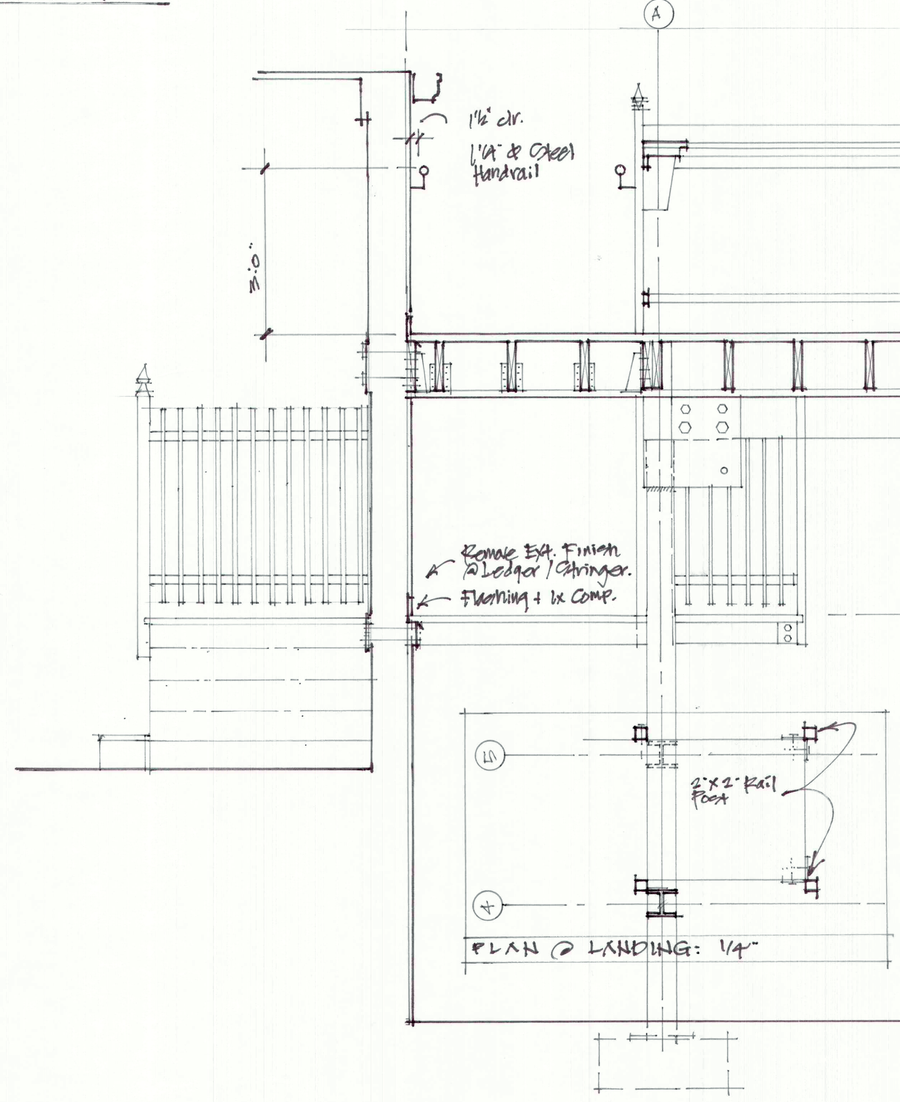

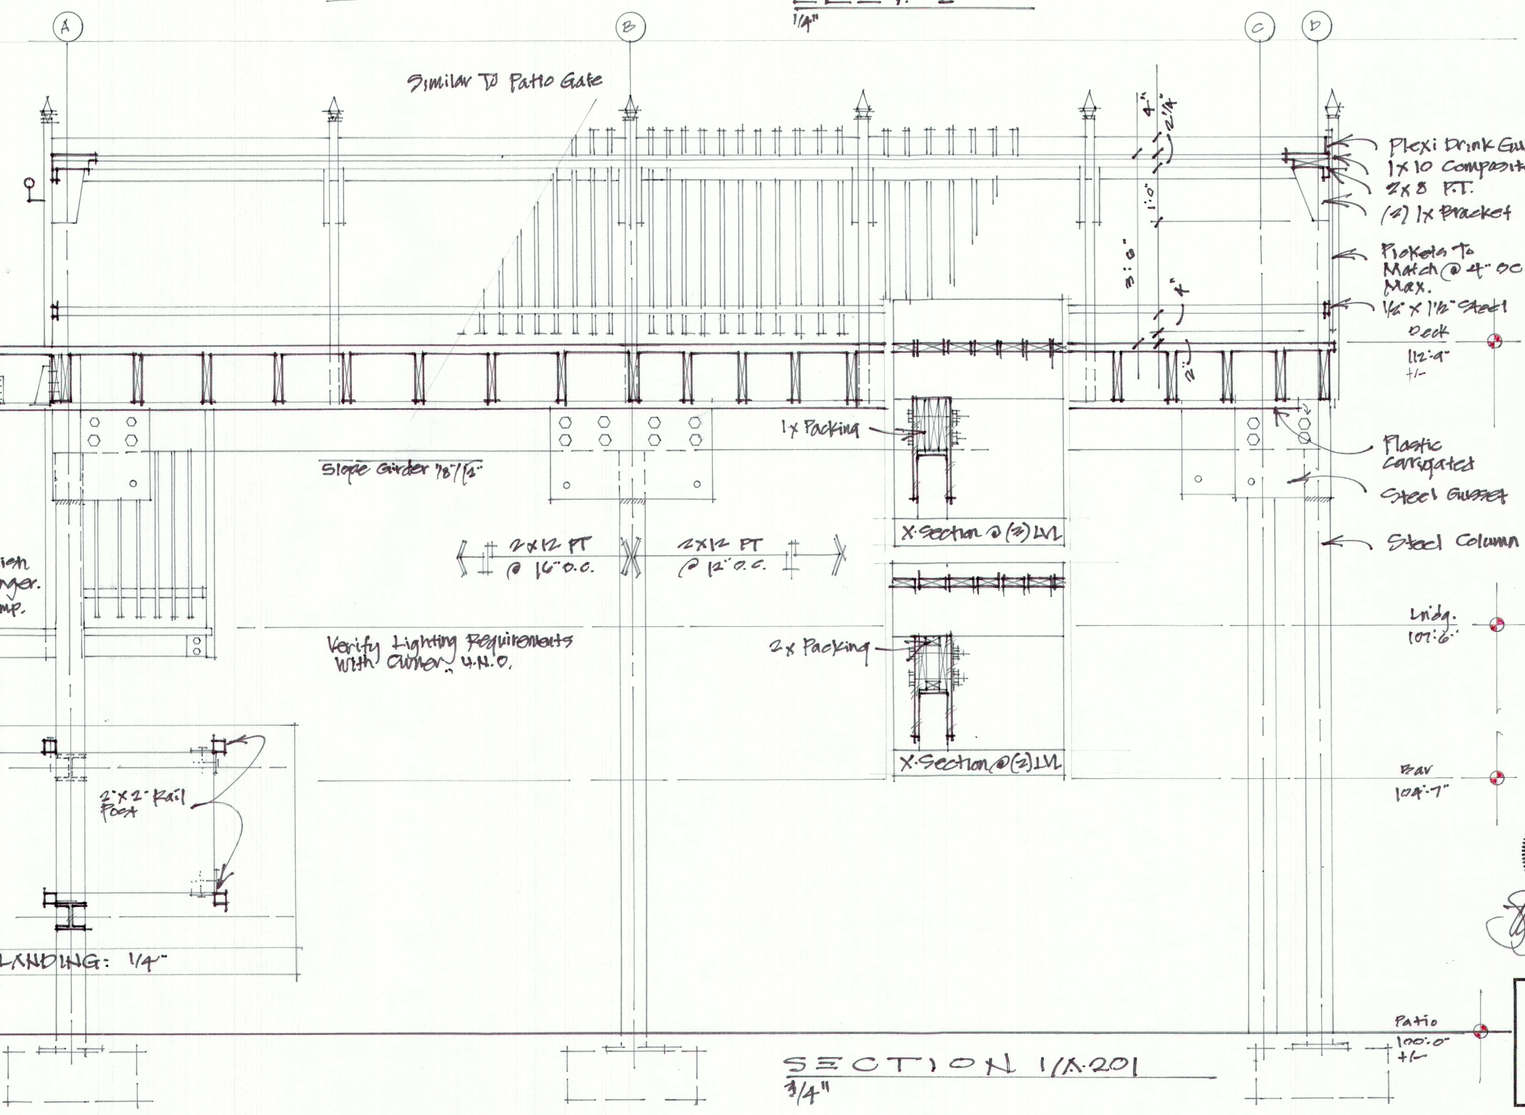


SECTION 1/A.201
3/4"

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711


STEPHENS SMITH FARRELL
REGISTERED ARCHITECT
NO 7488
NORTH CAROLINA
BLACK MOUNTAIN, NC


A.201

8.22.24

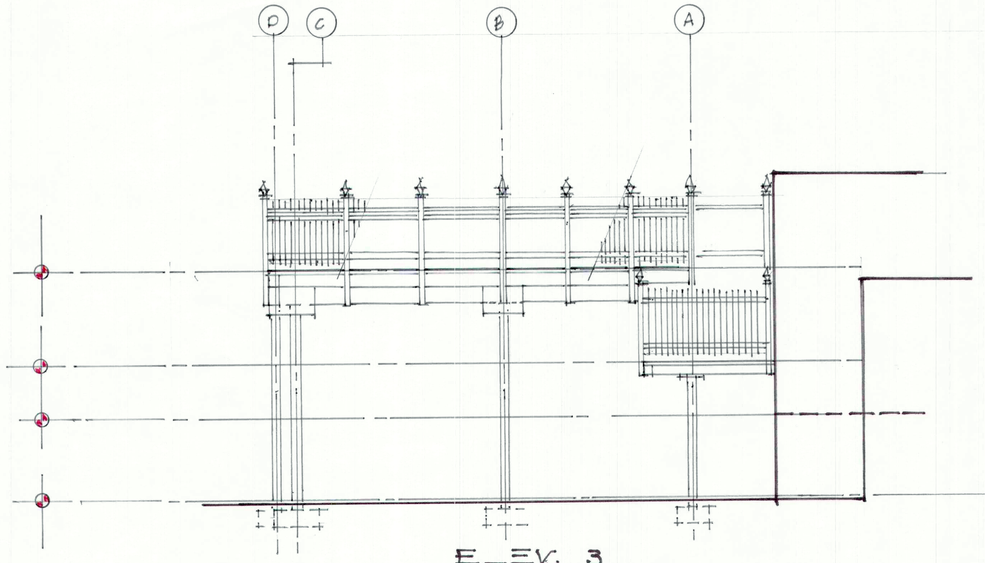

ELEV. 3
1/4"



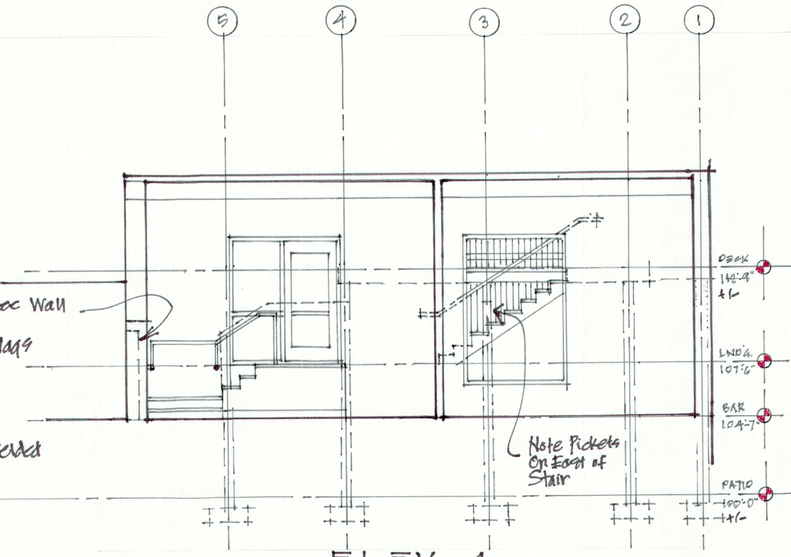


ELEV. 4
1/4"

STEPHENS SMITH FARRELL ARCHITECTURE


103 NINTH STREET
BLACK MOUNTAIN, NC 28711

828 231 4915

SSF@ASHEVILLE ARCHITECT.COM

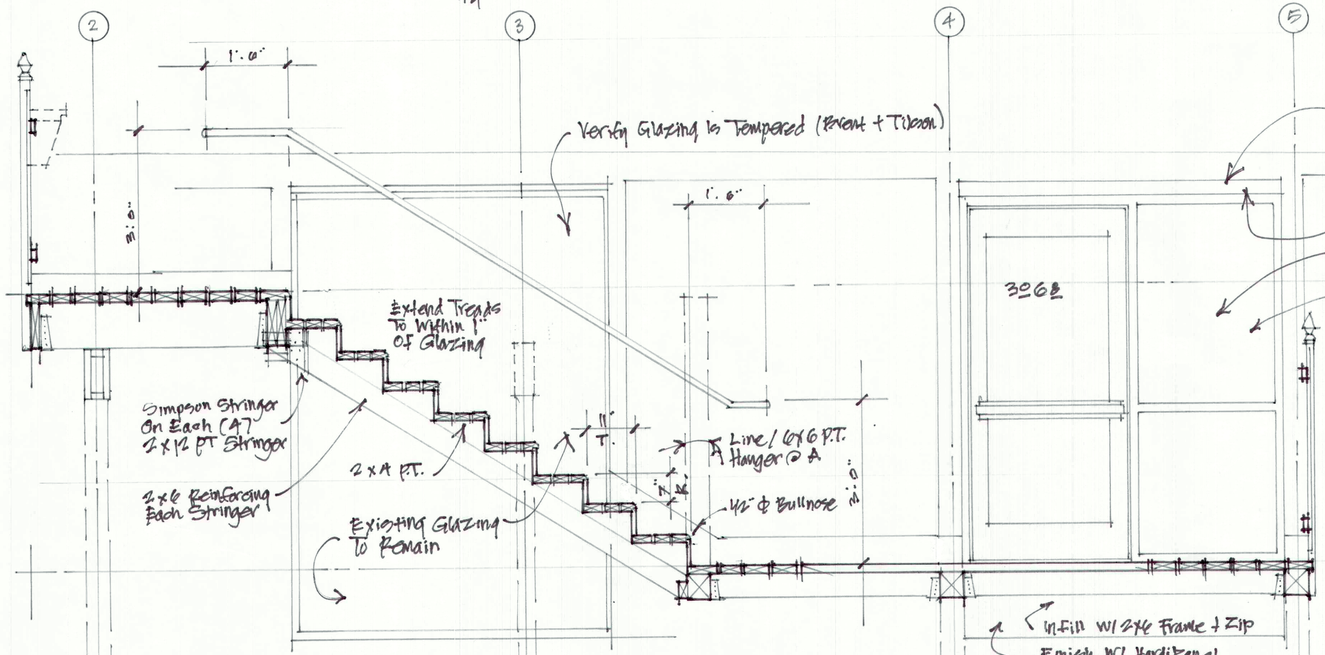

SECTION 3/A.202
3/4"

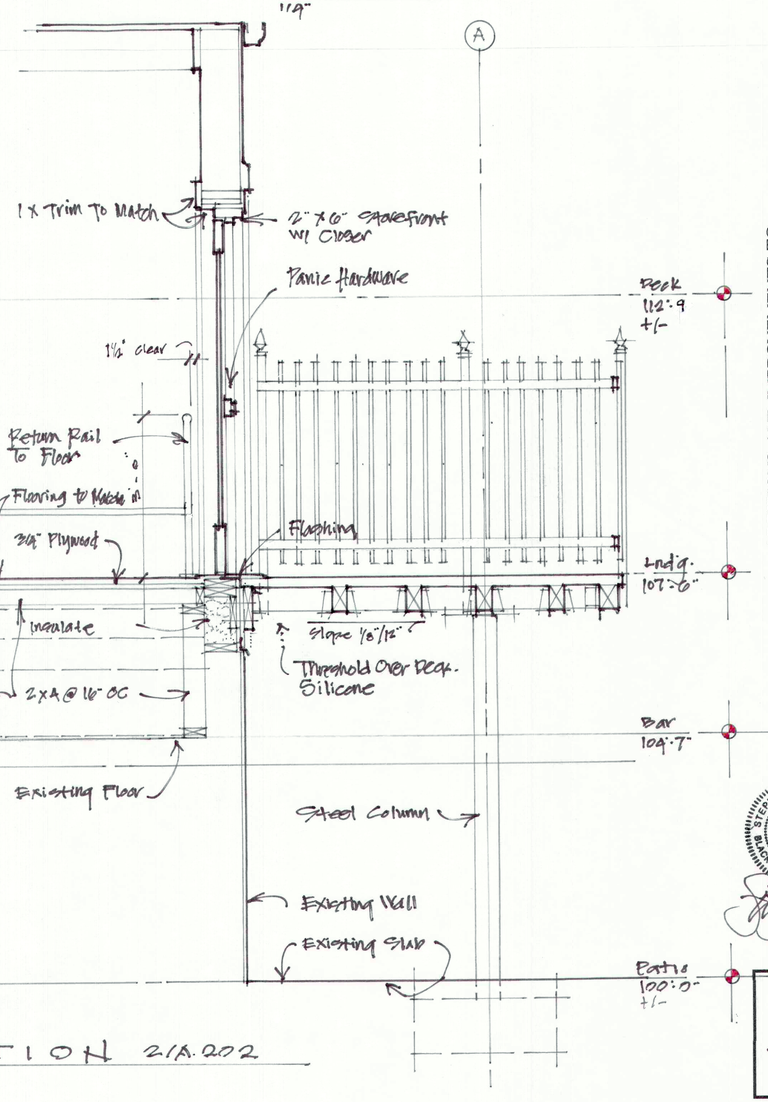


SECTION 2/A.202
3/4"

ADDITIONS AND IMPROVEMENTS TO:
MY FATHER'S PIZZA
110 CHERRY STREET
BLACK MOUNTAIN, NORTH CAROLINA 28711

STEPHENS SMITH FARRELL REGISTERED ARCHITECT NO. 7488 NORTH CAROLINA BLACK MOUNTAIN, NC

A.202

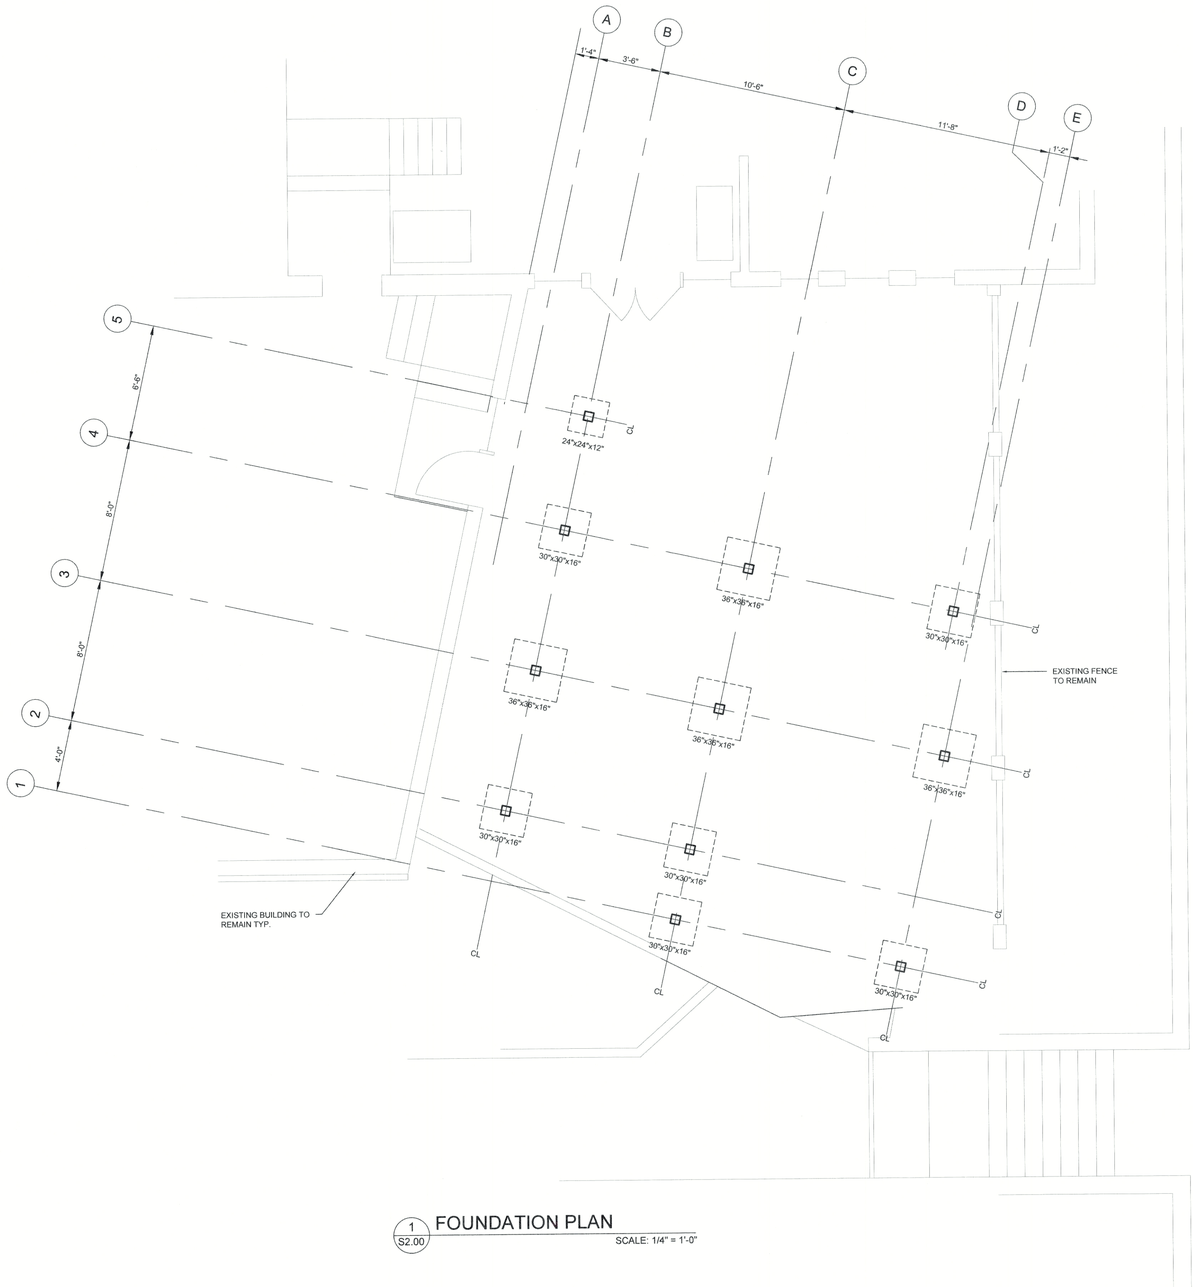

1 S2.00 FOUNDATION PLAN

SCALE: 1/4" = 1'-0"

LEGEND

MARK	DESCRIPTION
	EXISTING STRUCTURE
□	HSS 6x6x3/8" COLUMN

STRUCTURAL NOTES

1.0 GENERAL


1.1 ENGINEER'S SEAL APPLIES TO STRUCTURAL COMPONENTS ONLY AND DOES NOT CERTIFY ARCHITECTURAL LAYOUT OR DIMENSIONAL ACCURACY. ENGINEER IS NOT RESPONSIBLE FOR CONSTRUCTION METHODS OR ANY DEVIATION FROM THE PLANS. IF A DISCREPANCY ARISES BETWEEN THE DRAWINGS AND FIELD CONDITIONS, OR WHERE A DETAIL IS DOUBTFUL OF INTERPRETATION OR AN UNANTICIPATED FIELD CONDITION IS ENCOUNTERED, THE ENGINEER SHALL BE IMMEDIATELY CONTACTED FOR PROCEDURE TO BE FOLLOWED.

1.2 ALL CONSTRUCTION, WORKMANSHIP, MATERIAL QUALITY AND SELECTION SHALL BE IN ACCORDANCE WITH THE 2018 NORTH CAROLINA STATE BUILDING CODE FROM THE 2015 INTERNATIONAL BUILDING CODE, AND LOCAL CODES AND REGULATIONS. DIMENSIONS SHALL GOVERN OVER SCALE AND CODE SHALL GOVERN OVER DIMENSIONS.

2.0 CODES AND STANDARDS

2.1 "2018 NORTH CAROLINA STATE BUILDING CODE" AND "2015 INTERNATIONAL BUILDING CODE"

2.2 "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES" - SEI/ASCE 7.

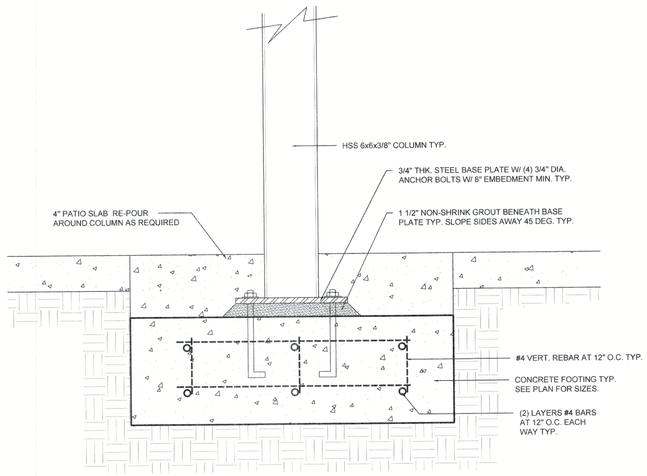

2 S2.00 SECTION FOUNDATION DETAIL

SCALE: 1 1/2" = 1'-0"

ALL DESIGNS REMAIN THE INTELLECTUAL PROPERTY OF SKYLAND ENGINEERING, INC. ANY UNAUTHORIZED USE OR DUPLICATION IS STRICTLY PROHIBITED. SKYLAND ENGINEERING, INC. IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO CONSTRUCTION METHODS OR ANY CHANGES TO PLANS MADE IN THE FIELD BY CONTRACTOR OR BY OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOR A CONDITIONAL ONE TIME USE ONLY. CONDITIONAL USE IS SPECIFIED FOR THE LOT NUMBER OR PROPERTY HEREIN.

NORTH CAROLINA PROFESSIONAL SEAL 047642 ENGINEER SAMUEL F. BYERS

PROJECT NO.: **SB-241317**

DATE: **09/09/2024**

SKYLAND ENGINEERING, INC.
(C-4615)
P.O. BOX 1942
SKYLAND, NC 28776
skylandengineeringnc@gmail.com

FOR CONSTRUCTION


CLIENT: **STEPHENS SMITH FERRELL ARCHITECTURE**

PROJECT: **MY FATHER'S PIZZA - DECK ADDITION**

LOCATION: **BLACK MOUNTAIN, NC**

SHEET NO.

S2.00

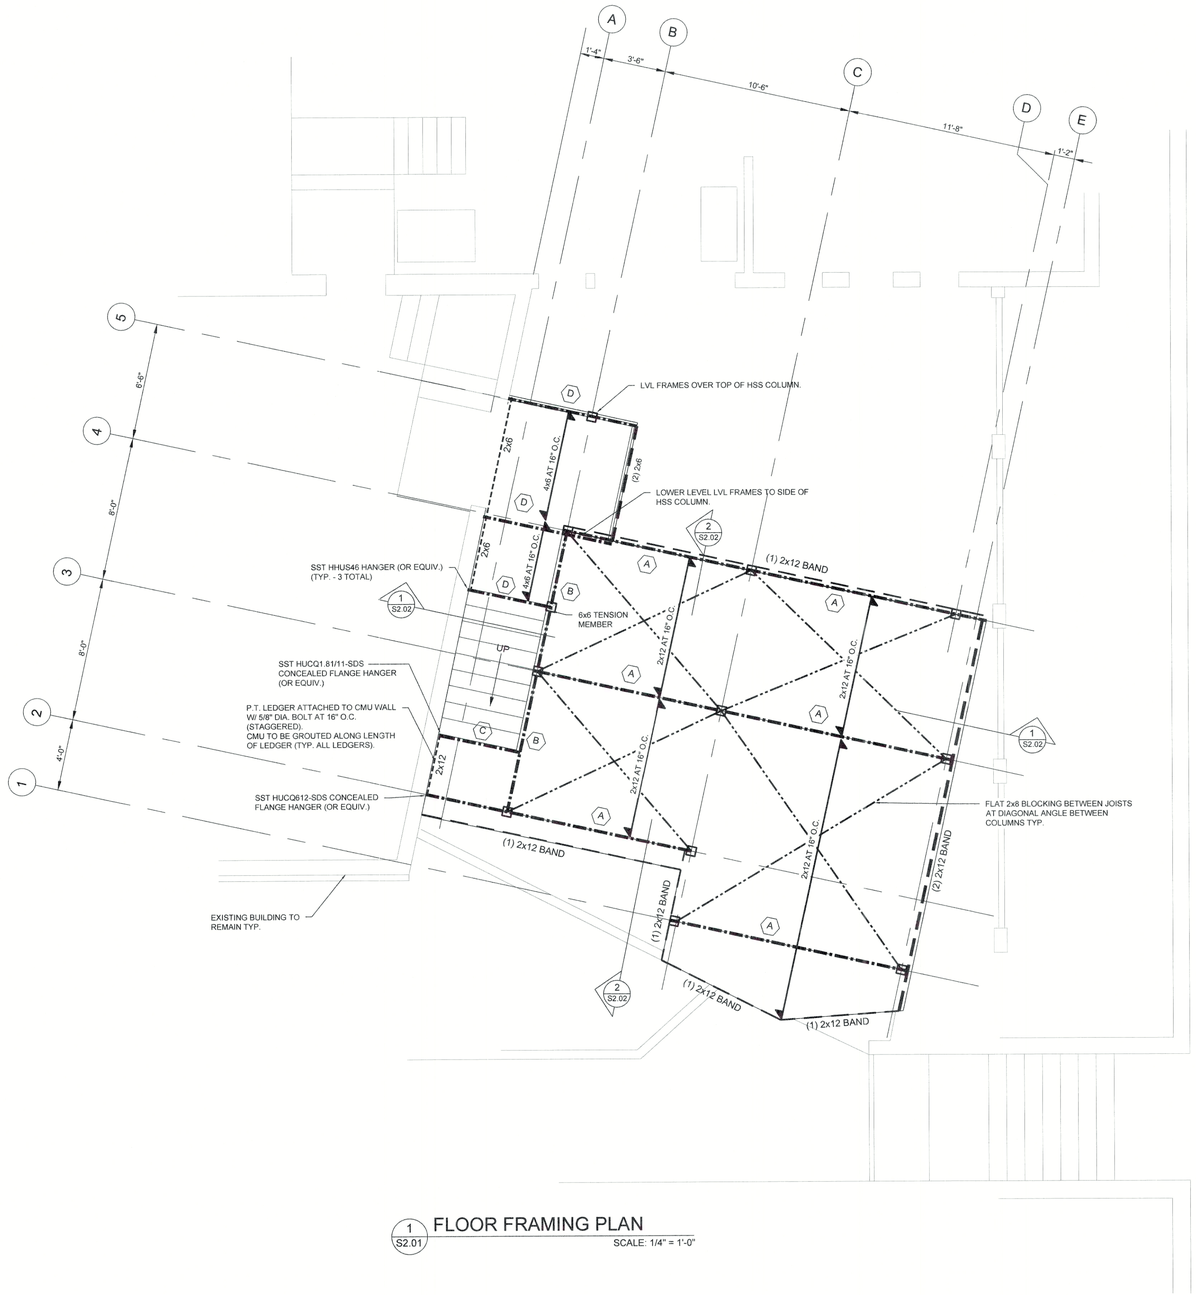

1 S2.01 FLOOR FRAMING PLAN

SCALE: 1/4" = 1'-0"

LEGEND

MARK	DESCRIPTION
———	EXISTING STRUCTURE
—·—·—	BEAM PER PLAN
— — —	FRAMING BAND PER PLAN
- - - - -	LEDGER PER PLAN
☒	6X6 POST
□	HSS 6x6x3/8" COLUMN
—·—·—	FLAT 2x8 BLOCKING BETWEEN JOISTS AT DIAGONAL ANGLE BETWEEN COLUMNS.

STRUCTURAL NOTES

1.0 GENERAL

1.1 ENGINEER'S SEAL APPLIES TO STRUCTURAL COMPONENTS ONLY AND DOES NOT CERTIFY ARCHITECTURAL LAYOUT OR DIMENSIONAL ACCURACY. ENGINEER IS NOT RESPONSIBLE FOR CONSTRUCTION METHODS OR ANY DEVIATION FROM THE PLANS. IF A DISCREPANCY ARISES BETWEEN THE DRAWINGS AND FIELD CONDITIONS, OR WHERE A DETAIL IS DOUBTFUL OF INTERPRETATION OR AN UNANTICIPATED FIELD CONDITION IS ENCOUNTERED, THE ENGINEER SHALL BE IMMEDIATELY CONTACTED FOR PROCEDURE TO BE FOLLOWED.

1.2 ALL CONSTRUCTION, WORKMANSHIP, MATERIAL QUALITY AND SELECTION SHALL BE IN ACCORDANCE WITH THE 2018 NORTH CAROLINA STATE BUILDING CODE FROM THE 2015 INTERNATIONAL BUILDING CODE, AND LOCAL CODES AND REGULATIONS. DIMENSIONS SHALL GOVERN OVER SCALE AND CODE SHALL GOVERN OVER DIMENSIONS.

2.0 CODES AND STANDARDS

2.1 "2018 NORTH CAROLINA STATE BUILDING CODE" AND "2015 INTERNATIONAL BUILDING CODE"

2.2 "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES" - SEI/ASCE 7.

BEAM SCHEDULE

BEAM	DESCRIPTION	LOCATION
A	(3) 1.75" x 11.25" LVL	DROPPED
B	(2) 1.75" x 11.25" LVL	FLUSH
C	(1) 1.75" x 11.25" LVL	FLUSH
D	(2) 1.75" x 5.5" LVL	FLUSH

ALL DESIGNS REMAIN THE INTELLECTUAL PROPERTY OF SKYLAND ENGINEERING, INC. ANY UNAUTHORIZED USE OR DUPLICATION IS STRICTLY PROHIBITED. SKYLAND ENGINEERING, INC. IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO CONSTRUCTION METHODS OR ANY CHANGES TO PLANS MADE IN THE FIELD BY CONTRACTOR OR BY OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOR A CONDITIONAL ONE TIME USE ONLY. CONDITIONAL USE IS SPECIFIED FOR THE LOT NUMBER OR PROPERTY HEREIN.

NORTH CAROLINA PROFESSIONAL SEAL 047642 ENGINEER SAMUEL F. BYERS

PROJECT NO.: **SB-241317**

DATE: **09/09/2024**

SKYLAND ENGINEERING, INC.
(C-4615)
P.O. BOX 19442
SKYLAND, NC 28776
skylandengineeringnc@gmail.com

FOR CONSTRUCTION


CLIENT: **STEPHENS SMITH FERRELL ARCHITECTURE**

PROJECT: **MY FATHER'S PIZZA - DECK ADDITION**

LOCATION: **BLACK MOUNTAIN, NC**


SHEET NO.

S2.01

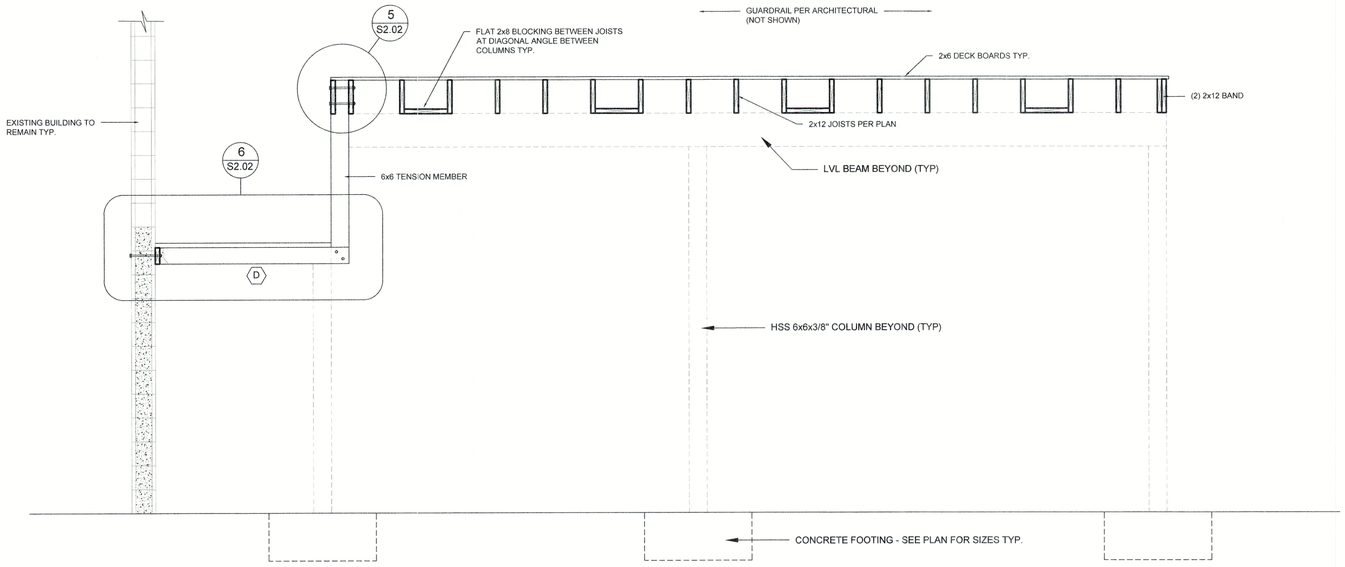


1 S2.02 SECTION

SCALE: 1/2" = 1'-0"

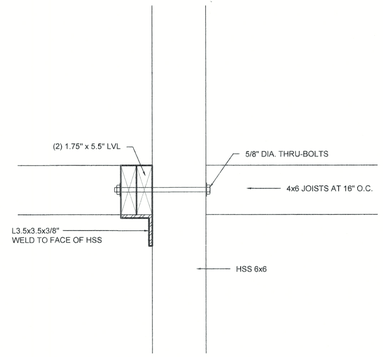


3 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"

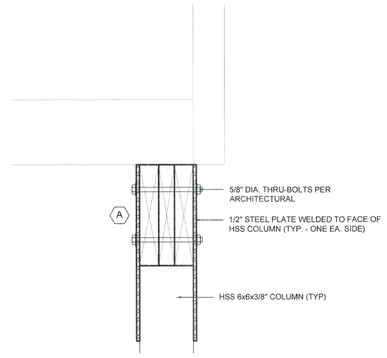

4 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"



5 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"

STRUCTURAL NOTES

1.0 GENERAL

1.1 ENGINEER'S SEAL APPLIES TO STRUCTURAL COMPONENTS ONLY AND DOES NOT CERTIFY ARCHITECTURAL LAYOUT OR DIMENSIONAL ACCURACY. ENGINEER IS NOT RESPONSIBLE FOR CONSTRUCTION METHODS OR ANY DEVIATION FROM THE PLANS. IF A DISCREPANCY ARISES BETWEEN THE DRAWINGS AND FIELD CONDITIONS, OR WHERE A DETAIL IS DOUBTFUL OF INTERPRETATION OR AN UNANTICIPATED FIELD CONDITION IS ENCOUNTERED, THE ENGINEER SHALL BE IMMEDIATELY CONTACTED FOR PROCEDURE TO BE FOLLOWED.

1.2 ALL CONSTRUCTION, WORKMANSHIP, MATERIAL QUALITY AND SELECTION SHALL BE IN ACCORDANCE WITH THE 2018 NORTH CAROLINA STATE BUILDING CODE FROM THE 2015 INTERNATIONAL BUILDING CODE, AND LOCAL CODES AND REGULATIONS. DIMENSIONS SHALL GOVERN OVER SCALE AND CODE SHALL GOVERN OVER DIMENSIONS.


2.0 CODES AND STANDARDS

2.1 "2018 NORTH CAROLINA STATE BUILDING CODE" AND "2015 INTERNATIONAL BUILDING CODE"

2.2 "MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES" - SEI/ASCE 7.


BEAM SCHEDULE

BEAM	DESCRIPTION	LOCATION
A	(3) 1.75" x 11.25" LVL	DROPPED
B	(2) 1.75" x 11.25" LVL	FLUSH
C	(1) 1.75" x 11.25" LVL	FLUSH
D	(2) 1.75" x 5.5" LVL	FLUSH

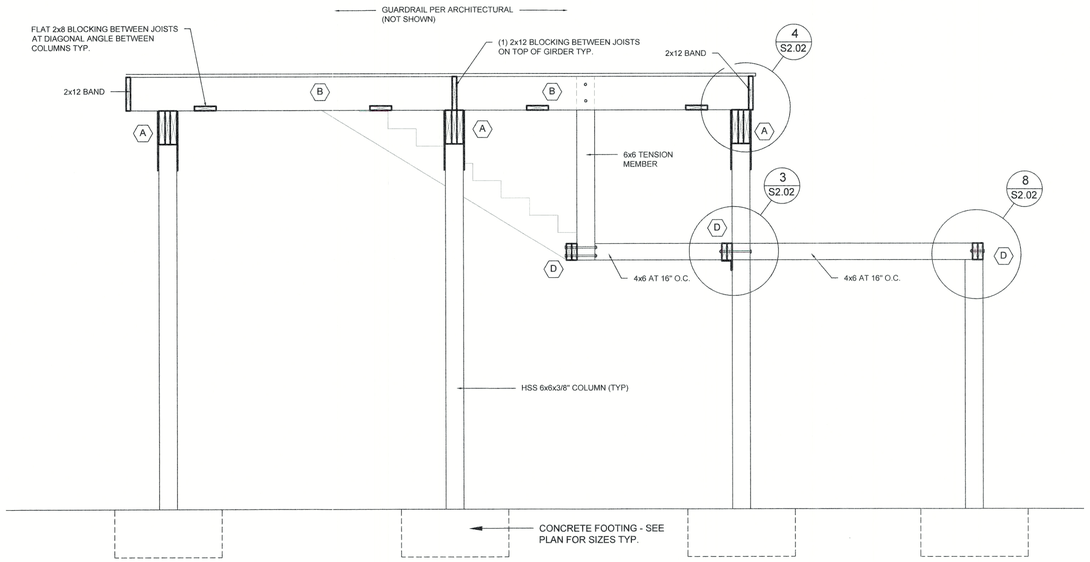


2 S2.02 SECTION

SCALE: 1/2" = 1'-0"

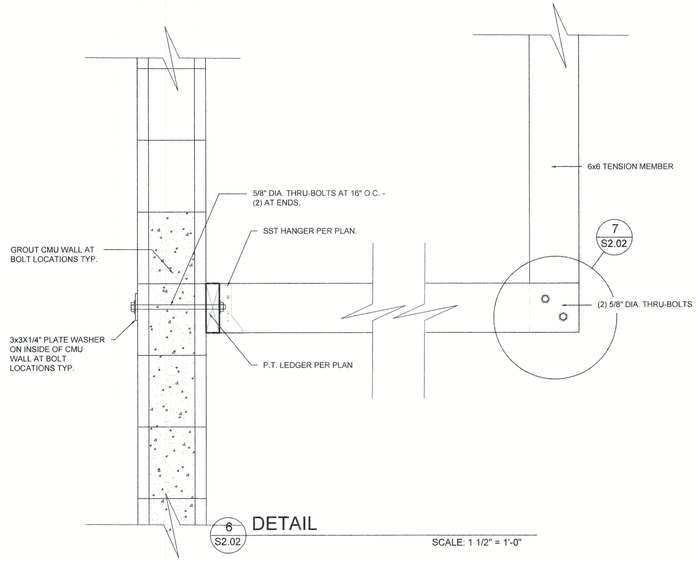


6 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"



7 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"



8 S2.02 DETAIL

SCALE: 1 1/2" = 1'-0"

ALL DESIGNS REMAIN THE INTELLECTUAL PROPERTY OF SKYLAND ENGINEERING, INC. ANY UNAUTHORIZED USE OR DUPLICATION IS STRICTLY PROHIBITED. SKYLAND ENGINEERING, INC. IS NOT LIABLE FOR CHANGES MADE TO PLANS DUE TO CONSTRUCTION METHODS OR ANY CHANGES TO PLANS MADE IN THE FIELD BY CONTRACTOR OR BY OTHERS. DRAWINGS ARE PROVIDED TO CLIENT FOR A CONDITIONAL ONE TIME USE ONLY. CONDITIONAL USE IS SPECIFIED FOR THE LOT NUMBER OR PROPERTY HEREIN.

NORTH CAROLINA PROFESSIONAL SEAL 047642 ENGINEER SAMUEL F. BYERS

PROJECT NO.: **SB-241317**

DATE: **09/09/2024**

SKYLAND ENGINEERING, INC.
(C-4615)
P.O. BOX 1942
SKYLAND, NC 28776
skylandengineeringnc@gmail.com

FOR CONSTRUCTION

CLIENT: **STEPHENS SMITH FERRELL ARCHITECTURE**

PROJECT: **MY FATHER'S PIZZA - DECK ADDITION**

LOCATION: **BLACK MOUNTAIN, NC**

SHEET NO.

S2.02